

actuator

عملگر آنوموتو



Solenoid Valve

Explosion-Proof



series Explosion-Proof



GB series flameproof coil

Model: ASGBH-T6-01
ASXGBH-T6-01

Working power supply:	"DC24V-3.5W/1.5W(50/60HZ)/AC110/220V-4VA AC240V-4.5VA"
Coil housing:	Aluminum alloy/Stainless steel 316L
Cable interface:	M20X1.5 BSPP or NPT
Insulation grade:	H-level coil
Dielectric strength:	1000V
Load cycle:	100ED
IP grade:	IP66
Explosion-proof grade:	ExdIICT4 DIPA20 TA,T6
Working temperature material:	-20~60°C

EM series casted explosion-proof coil

Model: ASEM55109

Coil diameter:	9mm
Rated voltage:	24V/DC 220V/AC 24V/DC 220V/AC
Rated power:	3.0W/4.5W/3.0W/4.5W
Ex-mark:	ExmbIICT5 Gb DIP A21 TA,T4
Explosion-proof grade:	ExmbII CT4
Insulation grade:	F grade
Threaded coupling:	G1/2"
Cable length:	1.5M
Ambient temp.:	-20°C ~60°C (standard type S) -195-40°C ~60°C (low-temperature type L)



GB series flameproof solenoid valve


Model: ASGB01-T6-01
ASGB02-T6-01

Air interface: 1/4"
1/4"

Working medium:	Compressed air
Working pressure:	0.01~0.8Mpa
IP grade:	IP66/NEMA4,4X
Explosion-proof grade:	ExdCT6 DIPA20 TA,T6
Valve body function:	5/2 and 3/2NC,CV=1.4(25mm)
Installation standard:	24X32NAMUR board or tube connection
Working temperature:	-10~80°C
Surface treatment:	Anodized or chemically coated nickel
Body material:	Aluminum
Seals:	NBR O-ring
Medium contact material:	Aluminum, reinforced nylon, NBR
Fastening screw:	Stainless steel



series
Explosion-Proof

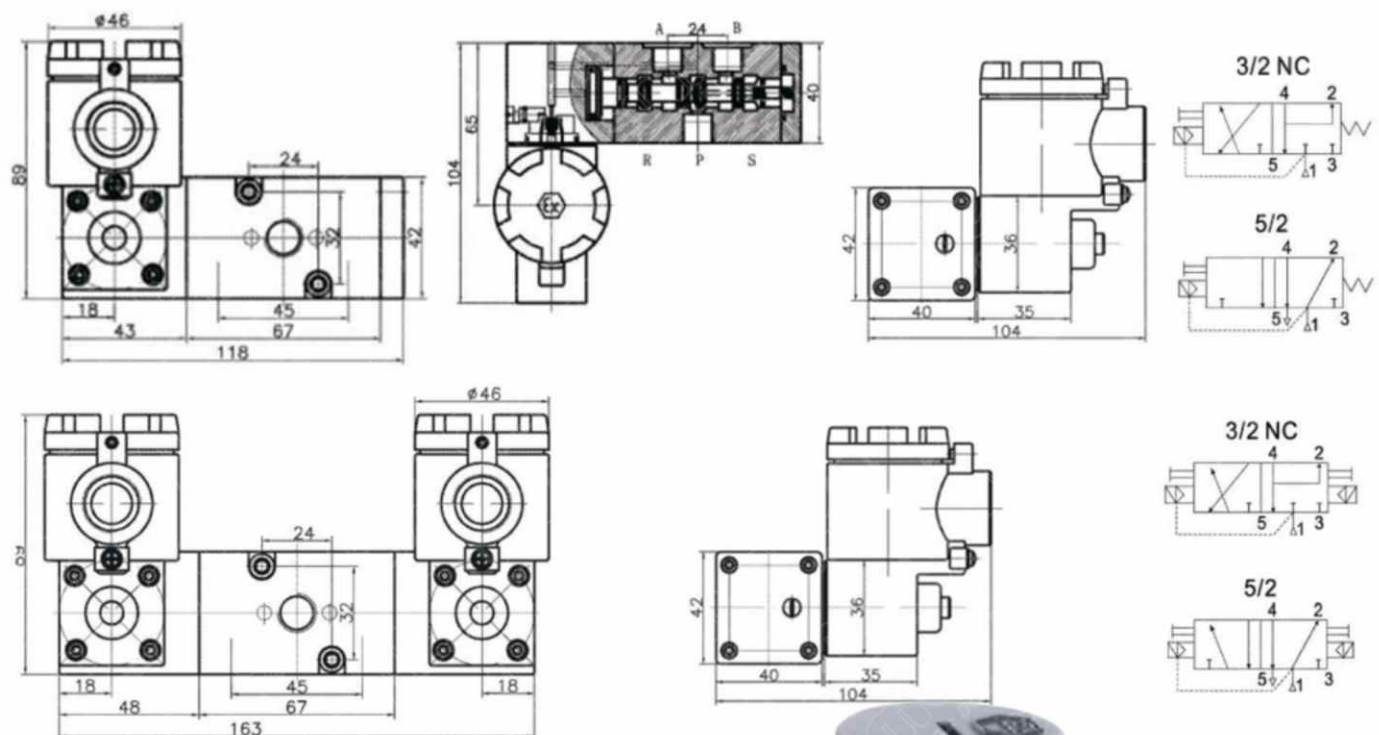

aumuto

عملگر آنوموتو *actuator*

B u i l d A Q u a l i t y

تهران، لاله زار جنوبی، روبه روی مسجد لاله زار، کوچه اتحادیه، پاساژ اتحادیه، طبقه همکف، پلاک ۳۱

تلفن: ۰۲۱-۳۳۹۹۸۲۰۴-۵ تلفکس: ۰۲۱-۴۰۳۳۰۳۴۰

www.aumuto.com